

Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

机器外观及技术参数如有更改，恕不另行通知。未经铸信公司明确书面许可，不得翻印或传播有关资料。

www.chinazxin.com



专注塑料包装行业解决方案

Focus On Plastic Packaging Industry Solutions



浙江铸信机械有限公司
ZHEJIANG ZHUXIN MACHINERY CO.,LTD

- 浙江省温州市平阳县宋桥镇章桥村粮油东路118号
Liangyou East Road 118, Zhangqiao.Wanquan Town,
Pingyang County, Wenzhou City, China
- 0577-63081111 / 63778111 / 63776555
- +86- (0) 13655772222
- 0577-63778011
- admin@chinazxin.com



WEBSITE

Since 1989



Lead The Industry For 30 Years And Continue To Surpass Ourselves

引领行业30年 不断超越自我

We researched and developed our machines on basis of advanced technology introduced from developed countries. As a professional and experienced manufacturer in China, we are able to produce many kinds of machines like film blowing machine, blown film machine, plastic extruder machine, film extrusion machine, bag making machine, paper bag making machine, packing machine, printing machine and leather & shoe cutting machines etc.

目前铸信的产品涵盖吹膜机、制袋机、纸袋机、印刷机、透明膜三维包装机（带防伪易拉线）和皮革机械等产品，产品畅销全国及亚、非、欧等30多个国家和地区。铸信愿与国内外各界朋友携手前进、再创辉煌！




VISION

Pursuing A Healthy Green Life

Protecting the environment and pursuing a healthy and green life stems from the pursuit of Zhuxin enterprise employees.

保护环境、追求健康的绿色生活，源自于铸信企业员工的追求

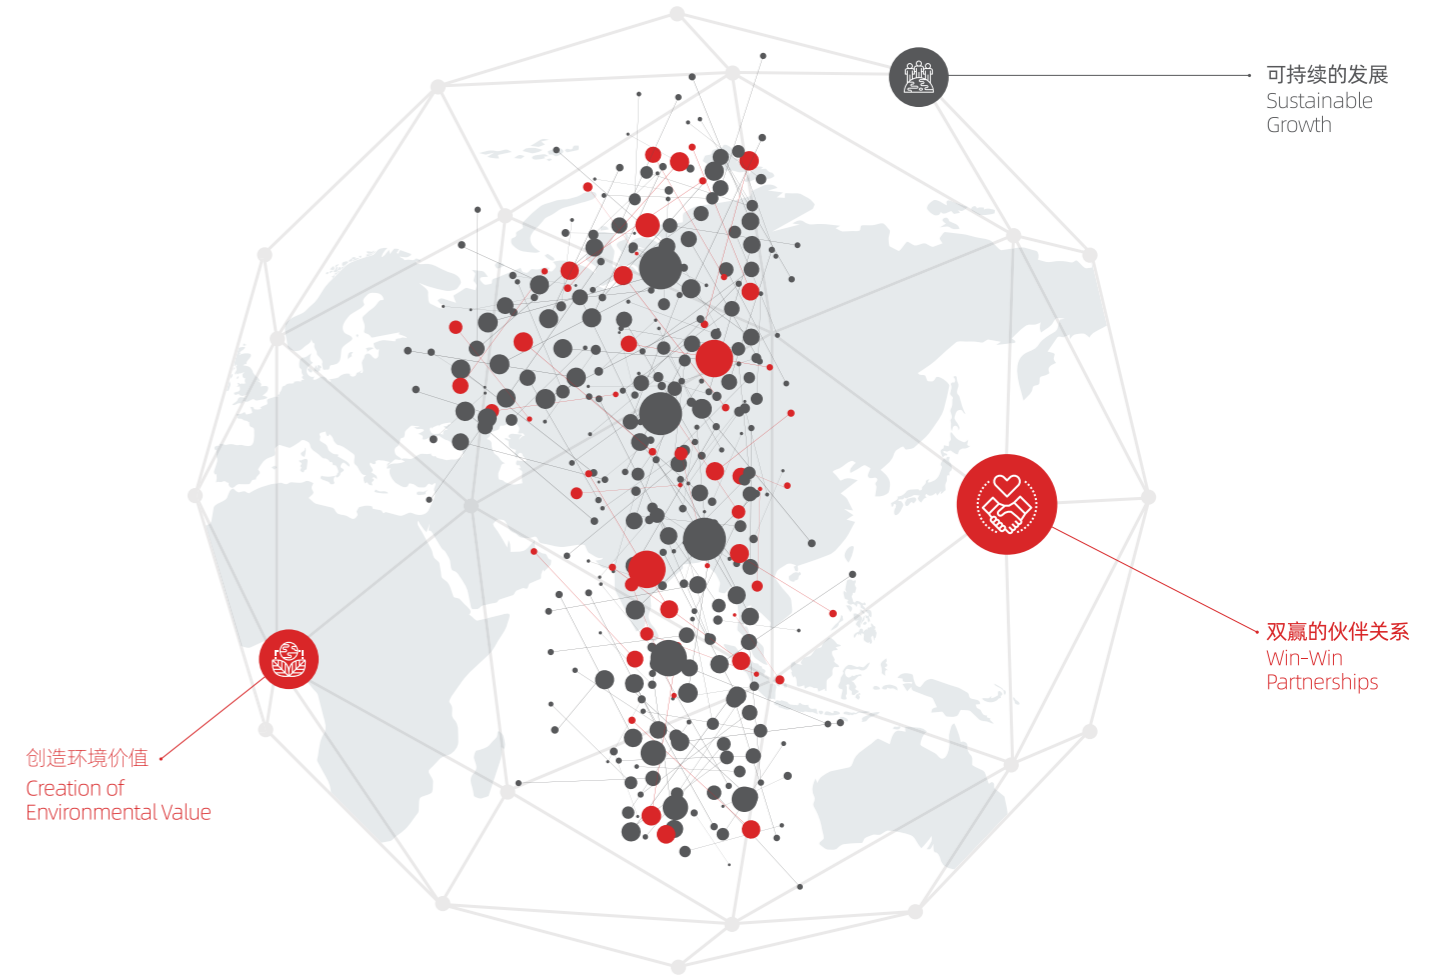

History

1989

进军机械领域
Entering the machinery

2004

浙江铸信机械有限公司成立
Zhejiang Zhuxin Machinery Co., Ltd. was established

2005

通过ISO9001国际质量体系认证
Passed ISO9001 International Quality System Certification

2009

建设超20亩现代化工厂，成为吹膜机行业领导者
Building over 20 acres of modernized factory. Become the leader of blown film machine industry

2012

“铸信”成为塑料包装领域业内知名品牌
"Zhuxin" has become a well-known brand in the field of plastic packaging

2022

荣获高新技术企业称号
Awarded the title of high-tech enterprise

2024

让梦想持续前行
Keeping the dream alive



Wide Range Of Applications Meet Your Different Needs

广泛的应用领域 满足您的不同需求




Producing Green Products
And Sharing Green Life With Society

生产绿色产品 与社会共享绿色生活



One-stop shopping
一站式采购

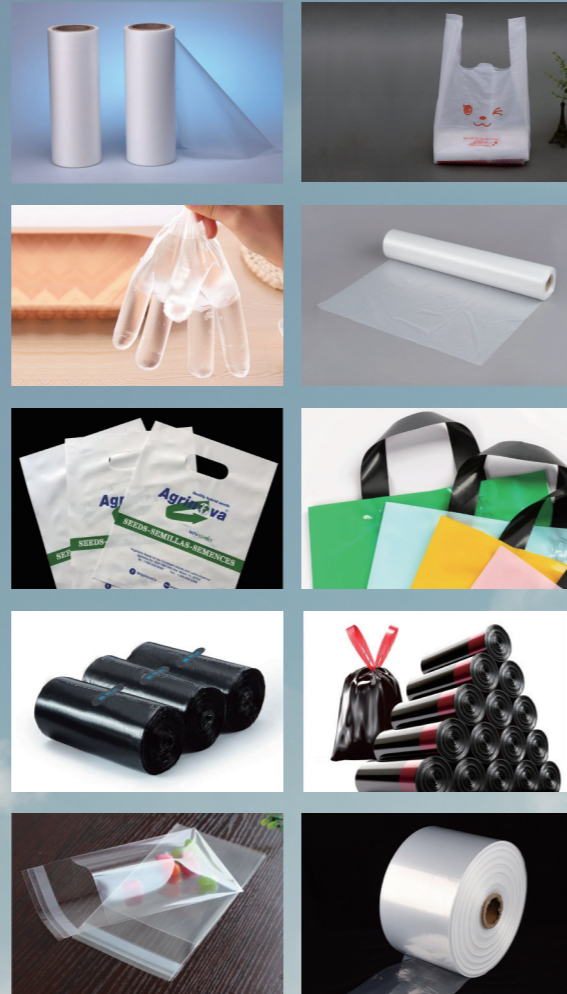

PROCESS FLOW
工艺流程



CONTENTS



Film Blowing Machine
吹膜机

05-18




Bag Making Machine
制袋机

19-26



Printing Machine
印刷机

27-29



Slitting Machine
分切机

30



Recycle Granulation Unit
造粒机

31-32


5 LAYERS-FFS-IBC

5 Layers Internal Bubble Cooling FFS
film blowing production line

五层共挤重包装内冷吹膜生产线



Equipment Accessories 设备配件



Main Technical Parameters 主要技术参数

型号	Model	5FFS-IBC
适应原料	Suitable material	LDPE、LLDPE、MLLDPE、HDPE
生产最大膜宽	Maximum film width	1000mm
制品厚度	Product thickness	0.10mm ~ 0.25mm
螺杆直径	Screw diameter	A:φ60 B:φ60 C:φ75 D:φ60 E:φ60
螺杆长径比	Screw l/d length	30:1
齿轮箱型号	Gearbox Model	A:200 B:200 C:225 D:200 E:200
电机功率	Motor power	A:30kw B:30kw C:37kw D:30kw E:30kw
最大挤出量	Max output	250Kg/h
最大收卷卷径	Max winding diameter	φ1400mm
模口直径	Die diameter	φ200mm
收卷方式	Winding method	Back to back automatic double winding 背靠背全自动双收卷
水平式360度上牵引旋转	Horizontal 360 degree upward traction rotation	
IBC膜泡内冷控制系统	Ibc bubble internal cooling control system	
多组分喂料系统	Multi feeding gravmetric dosing system	5 sets
设备外形尺寸 (长×宽×高)	Machine outline dimension (L×W×H)	10×7.5×15m



* 机器外观及技术参数如有更改，恕不另行通知。未铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhui reserves the right to supply the improved products without prior notice.

ABC-IBC

Co-extrusion Internal Bubble Cooling
Haul-off Rotary Film Product Line

三层共挤牵引旋转膜泡内冷吹膜机

Equipment Accessories 设备配件

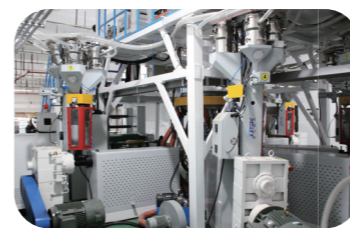

Main Technical Parameters 主要技术参数

型号	Mode	ABC-1400	ABC-1700	ABC-2200
通用材料	Suitable material	HDPE LDPE LLDPE	HDPE LDPE LLDPE	HDPE LDPE LLDPE
产品宽度	Film width	800-1200mm	1000-1500mm	1200-2000mm
产品厚度	Film thickness	0.028-0.20mm	0.028-0.20mm	0.03-0.20mm
最大产量	Max. extrusion output	120kg/hr	150kg/hr	200kg/hr
螺杆直径	Screw diameter	A:φ50 B:φ50 C:φ50	A:φ55 B:φ60 C:φ55	A:φ60 B:φ65 C:φ60
螺杆长径比	Screw l/d length	30:1	30:1	30:1
主机功率	Main motor	15kw×3	A18.5+B22+C18.5	A22+B30+C22
模口	Die size	280mm	350mm	500mm
风机	Air blower	7.5kw	11kw	15kw
牵引辊宽	Roller width	1400mm	1700mm	2200mm
引取电机功率	Take-up motor	1.5kw	2.2kw	2.2kw
卷取功率	Winding motor	1.5kw	2.2kw	2.2kw
外形尺寸 (长×宽×高)	Outline dimension(L×W×H)	9.5×4.5×7.5m	10.5×5.0×9m	11.5×5.5×10m

* 机器外观及技术参数如有更改，恕不另行通知。未铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhui reserves the right to supply the improved products without prior notice.

ABC CO-EX

3SJ-G Series Three-layer Co-extrusion Rotary Die Head Film blowing machine set

三层共挤旋转机头吹膜机组



Optional Equipment 选择性配备

自动吸料机	Auto loader
电晕处理	Corona treater
快换网装置	Mechanics screen changer
气胀轴	Air shaft
米克重	Metric weight system
自动收卷	Automatic winder



Main Technical Parameters 主要技术参数

型号	Model	ABC-1300	ABC-1600	ABC-2100
通用材料	Suitable material	HDPE LDPE LLDPE	HDPE LDPE LLDPE	HDPE LDPE LLDPE
产品宽度	Film width	800-1200mm	1000-1500mm	1200-2000mm
产品厚度	Film thickness	0.028-0.20mm	0.028-0.20mm	0.03-0.20mm
最大产量	Max. Extrusion output	120kg/hr	150kg/hr	200kg/hr
螺杆直径	Screw diameter	φ50×3	Aφ55 Bφ60 Cφ55	Aφ60 Bφ65 Cφ60
螺杆长径比	Screw l/d length	30:1	30:1	30:1
主机功率	Main motor	15kw×3	A18.5+B22+C18.5	A22+B30+C22
模口	Die size	280mm	350mm	500mm
风机	Air blower	4kw	5.5kw	7.5kw
牵引辊宽	Roller width	1300mm	1600mm	2100mm
引取电机功率	Take-up motor	1.5kw	2.2kw	2.2kw
卷取功率	Winding motor	1.5kw	2.2kw	2.2kw
外形尺寸 (长×宽×高)	Outline dimension(L×W×H)	9.5×4.5×7.5m	10.5×5.0×9m	11.5×5.5×10m

* 机器外观及技术参数如有更改，恕不另行通知。未铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuixin is continuously seeking for development of their products, for this reason, Zhuixin reserves the right to supply the improved products without prior notice.

ABA CO-EX

Film Blowing Machine

吹膜机



Optional Equipment 选择性配备

自动吸料机	Auto loader
电晕处理	Corona treater
快换网装置	Mechanics screen changer
气胀轴	Air shaft
米克重	Metric weight system
自动收卷	Automatic winder



Main Technical Parameters 主要技术参数

型号	Model	ABA-900	ABA-1100	ABA-1300
通用材料	Suitable material	HDPE LDPE LLDPE	HDPE LDPE LLDPE	HDPE LDPE LLDPE
产品宽度	Film width	400-800mm	500-1000mm	600-1200mm
产品厚度	Film thickness	0.02-0.10mm	0.02-0.10mm	0.02-0.10mm
最大产量	Max. extrusion output	HAPE: 80kg/hr LDPE:120kg/hr	HAPE: 100kg/hr LDPE:150kg/hr	HAPE: 120kg/hr LDPE:180kg/hr
螺杆直径	Screw diameter	φ50×2	φ55×2	φ55×1 φ65×1
螺杆长径比	Screw l/d length	30:1	30:1	30:1
模口	Die size	LDPE: 180 HDPE: 80	LDPE: 220 HDPE: 100	LDPE: 250 HDPE: 120
风机	Air blower	3kw×1	4kw×1	5.5kw×1
牵引辊宽	Roller width	900mm	1100mm	1300mm
引取电机功率	Take-up motor	1.5kw	1.5kw	2.2kw
卷取功率	Winding motor	16N.m	16N.m	16N.m
外形尺寸 (长×宽×高)	Outline dimension(L×W×H)	4.8×3.2×5.5m	5×3.5×6m	5×3.7×7.5m

* 机器外观及技术参数如有更改，恕不另行通知。未铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuixin is continuously seeking for development of their products, for this reason, Zhuixin reserves the right to supply the improved products without prior notice.

AB CO-EX

Double-layer Co-extrusion Rotary Die Head
Film Blowing Machine set

两层共挤旋转机头吹膜机组

Optional Equipment 选择性配备

自动吸料机	Auto loader
电晕处理	Corona treater
快换网装置	Mechanics screen changer
气涨轴	Air shaft
米克重	Metric weight system
自动收卷	Automatic winder



Main Technical Parameters 主要技术参数

型号	Model	AB-1100	AB-1600	AB-2000
通用材料	Suitable material	HDPE LDPE LLDPE	HDPE LDPE LLDPE	HDPE LDPE LLDPE
产品宽度	Film width	600-1200mm	800-1500mm	1000-1500mm
产品厚度	Film thickness	0.03-0.20mm	0.03-0.20mm	0.03-0.20mm
最大产量	Max. extrusion output	80kg/hr	120kg/hr	150kg/hr
螺杆直径	Screw diameter	φ50×2	φ55×2	φ60×2
螺杆长径比	Screw l/d length	30:1	30:1	30:1
主机功率	Main motor	15kw×2	18.5kw×2	22kw×2
模口	Die size	φ220mm	φ250mm	φ350mm
风机	Air blower	4kw	5.5kw	7.5kw
牵引辊宽	Roller width	1100mm	1600mm	2000mm
引取电机功率	Take-up motor	1.5kw	1.5kw	2.2kw
卷取功率	Winding motor	10N.m	16N.m	18N.m
外形尺寸 (长×宽×高)	Outline dimension(L×W×H)	6.5×5.5×5.5m	7.5×5.8×7.5m	7.8×6.4×8m

* 机器外观及技术参数如有更改，恕不另行通知。未铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuixin is continuously seeking for development of their products, for this reason, Zhuixin reserves the right to supply the improved products without prior notice.

MOPO LDPE/HDPE 1500/2000

Film Blowing Machine

吹膜机

Optional Equipment 选择性配备

自动吸料机	Auto loader
电晕处理	Corona treater
快换网装置	Mechanics screen changer
气涨轴	Air shaft
米克重	Metric weight system
自动收卷	Automatic winder



Main Technical Parameters 主要技术参数

型号	Model	SJ-B75	SJ-B100
通用材料	Suitable material	HDPE LDPE LLDPE	HDPE LDPE LLDPE
产品宽度	Film width	700-1500mm	1200-2000mm
产品厚度	Film thickness	0.03-0.20mm	0.03-0.20mm
最大产量	Max. extrusion output	HD	70kg/hr
		LD	80kg/hr
螺杆直径	Screw diameter	φ75	φ100
螺杆长径比	Screw l/d length	30:1	30:1
模口	Die size	HD	φ150
		LD	φ350
风机	Air blower	5.5kw	7.5kw
牵引辊宽	Roller width	1600mm	2100mm
引取电机功率	Take-up motor	1.5kw	2.2kw
卷取功率	Winding motor	25N.m	25N.m
外形尺寸 (长×宽×高)	Outline dimension(L×W×H)	6×3×7.5m	7.1×3.5×9m

* 机器外观及技术参数如有更改，恕不另行通知。未铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuixin is continuously seeking for development of their products, for this reason, Zhuixin reserves the right to supply the improved products without prior notice.

PP

Film Blowing Machine

吹膜机


Optional Equipment 选择性配备

自动吸料机	Auto loader
电晕处理	Corona treater
快换网装置	Mechanics screen changer
气胀轴	Air shaft
米克重	Metric weight system
自动收卷	Automatic winder

Main Technical Parameters 主要技术参数

型号	Model	PP-600	PP-700	PP-900
通用材料	Suitable material	PP	PP	PP
产品宽度	Film width	100-500mm	150-600mm	200-800mm
产品厚度	Film thickness	0.03-0.11mm	0.03-0.11mm	0.03-0.11mm
最大产量	Max. extrusion output	30kg/hr	45kg/hr	60kg/hr
螺杆直径	Screw diameter	φ50	φ55	φ65
螺杆长径比	Screw l/d length	30:1	30:1	30:1
模口	Die size	φ150	φ200	φ250
风机	Air blower	1.5kw	1.5kw	1.5kw
牵引辊宽	Roller width	600mm	700mm	900mm
引取电机功率	Take-up motor	0.75kw	1.1kw	1.5kw
卷取功率	Winding motor	10N.m	10N.m	16N.m
外形尺寸(长×宽×高)	Outline dimension(L×W×H)	3.2×2×3.5m	4.2×2.5×4m	4.6×2.8×4.5m

* 机器外观及技术参数如有更改，恕不另行通知。未铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuixin is continuously seeking for development of their products, for this reason, Zhuixin reserves the right to supply the improved products without prior notice.

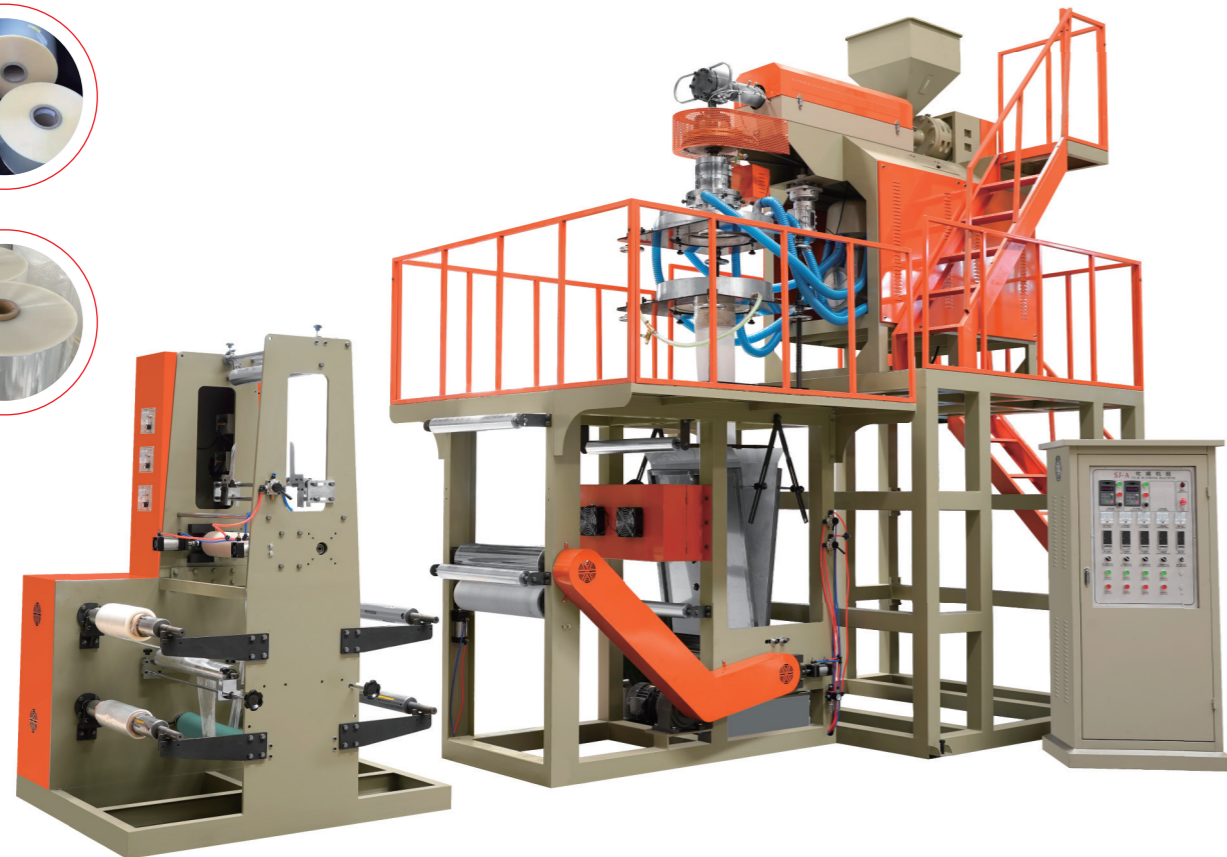

MONO LDPE

Rotary Head Double
Winder PE Film Blowing Machine

旋转机头双收卷吹膜机

Optional Equipment 选择性配备

自动吸料机	Auto loader
电晕处理	Corona treater
快换网装置	Mechanics screen changer
气胀轴	Air shaft
米克重	Metric weight system
自动收卷	Automatic winder



Main Technical Parameters 主要技术参数

型号	Model	SJ-H45	SJ-H50	SJ-H55	SJ-H60	SJ-H65
通用材料	Suitable material	HDPE LDPE LLDPE	HDPE LDPE LLDPE	HDPE LDPE LLDPE	HDPE LDPE LLDPE	HDPE LDPE LLDPE
产品宽度	Film width	100-500mm	300-600mm	400-800mm	500-1000mm	600-1200mm
产品厚度	HD	0.009-0.10mm	0.009-0.10mm	0.009-0.15mm	0.009-0.15mm	0.009-0.15mm
	LD	0.02-0.15mm	0.02-0.15mm	0.03-0.15mm	0.03-0.15mm	0.03-0.15mm
最大产量	HD	35kg/hr	40kg/hr	50kg/hr	55kg/hr	65kg/hr
	LD	40kg/hr	45kg/hr	60kg/hr	70kg/hr	80kg/hr
螺杆直径	Screw diameter	φ45	φ50	φ55	φ60	φ65
螺杆长径比	Screw l/d length	30:1	30:1	30:1	30:1	30:1
主机功率	Main motor	11kw	15kw	18.5kw	22kw	22kw
模口	HD	φ60	φ80	φ80	φ100	φ100
	LD	φ100	φ120	φ180	φ200	φ220
风机	Air blower	1.5kw	1.5kw	2.2kw	3kw	3kw
牵引辊宽	Roller width	600mm	700mm	900mm	1100mm	1300mm
引取电机功率	Take-up motor	0.75kw	1.1kw	1.5kw	1.5kw	1.5kw
卷取功率	Winding motor	6N.m	10N.m	10N.m	16N.m	16N.m
外形尺寸(长×宽×高)	Outline dimension(L×W×H)	3.8×2.0×4.1m	5.0×2.2×4.5m	5.5×2.5×5.2m	5.8×2.8×6.3m	5.8×2.8×6.3m

* 机器外观及技术参数如有更改，恕不另行通知。未铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuixin is continuously seeking for development of their products, for this reason, Zhuixin reserves the right to supply the improved products without prior notice.

MONO HDPE

Single Winder HD/LDPE
Film Blowing Machine
单收高低压吹膜机

Optional Equipment 选择性配备

自动吸料机	Auto loader
电晕处理	Corona treater
快换网装置	Mechanics screen changer
气胀轴	Air shaft
米克重	Metric weight system
自动收卷	Automatic winder



Main Technical Parameters 主要技术参数

型号	Model	SJ-A45	SJ-A50	SJ-A55	SJ-A60	SJ-A65	
通用材料	Suitable material	HDPE LDPE LLDPE	HDPE LDPE LLDPE	HDPE LDPE LLDPE	HDPE LDPE LLDPE	HDPE LDPE LLDPE	
产品宽度	Film width	100-500mm	300-600mm	400-800mm	500-1000mm	600-1200mm	
产品厚度	Flim thickness	HD	0.009-0.10mm	0.009-0.10mm	0.009-0.15mm	0.009-0.15mm	
		LD	0.02-0.15mm	0.02-0.15mm	0.03-0.15mm	0.03-0.15mm	0.03-0.15mm
最大产量	Max. extrusion output	HD	35kg/hr	40kg/hr	50kg/hr	55kg/hr	60kg/hr
		LD	45kg/hr	50kg/hr	60kg/hr	70kg/hr	80kg/hr
螺杆直径	Screw diameter	φ45	φ50	φ55	φ60	φ65	
螺杆长径比	Screw l/d length	30:1	30:1	30:1	30:1	30:1	
模头尺寸	Die size	HD	φ60	φ80	φ80	φ100	φ100
		LD	φ100	φ120	φ180	φ200	φ220
风机	Air blower	1.5kw	2.2kw	2.2kw	3kw	4kw	
牵引辊宽	Roller width	600mm	700mm	900mm	1100mm	1300mm	
引取电机功率	Take-up motor	0.75kw	1.1kw	1.5kw	1.5kw	2.2kw	
卷取功率	Winding motor	6N.m	10N.m	10N.m	16N.m	16N.m	
外形尺寸(长×宽×高)	Outline dimension(L×W×H)	3.8×2.0×4.1m	5.0×2.2×4.5m	5.5×2.5×5.2m	5.8×2.8×6.3m	5.8×2.8×6.3m	

* 机器外观及技术参数如有更改，恕不另行通知。未铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

MONO DOUBLE HEAD

Single-screw Double-die
Film Blowing Machine Set
单螺旋双模头吹膜机组



Main Technical Parameters 主要技术参数

型号	Model	SJ-60	SJ-70
螺杆直径	Screw diameter	φ60	φ70
螺杆长径比	Screw l/d length	30:1	30:1
薄膜折径	Reduced diameter of film	100-500mm	100-600mm
薄膜厚度	Thickness of film	0.010-0.08mm	0.010-0.08mm
主机功率	Power of main motor	22kw	30kw
产量	Output	40-60kg/h	50-70kg/h
外形尺寸(长×宽×高)	Outline dimension(L×W×H)	6200×3000×3200mm	6500×3200×3300mm

* 机器外观及技术参数如有更改，恕不另行通知。未铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

DOUBLE COLOR

Double-colour
Film Blowing Machine Set
双色吹塑薄膜机组



Main Technical Parameters 主要技术参数

型号	Model	S-40Dx2x500
螺杆直径	Screw diameter	40x2
螺杆长径比	Screw l/d length	28:1/30:1
最大挤出量	Main output	30-60kg/h
薄膜折径	Max folding width of film	500mm
薄膜厚度	Thickness of film	0.01-0.06mm
主机功率	Power of main motor	11kw
外形尺寸 (长×宽×高)	Outline dimension(L×W×H)	3800×2000×2800mm

* 机器外观及技术参数如有更改，恕不另行通知。未铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

MONO-INLINE PRINTING(GRAVURE)

Plastic Blowing Film Gravure Printing Unit
塑料吹膜凹版印刷机组



Optional Equipment 选择性配备

自动吸料机	Auto loader
电晕处理	Corona treater
快换网装置	Mechanics screen changer
气胀轴	Air shaft
米克重	Metric weight system
自动收卷	Automatic winder


Main Technical Parameters 主要技术参数

型号	Model	SJ-P45	SJ-P50	SJ-P55	SJ-P60	SJ-P65
通用材料	Suitable material	HDPE LDPE LLDPE	HDPE LDPE LLDPE	HDPE LDPE LLDPE	HDPE LDPE LLDPE	HDPE LDPE LLDPE
产品宽度	Film width	100-500mm	300-600mm	400-800mm	500-1000mm	600-1200mm
产品厚度	Film thickness	HD	0.009-0.10mm	0.009-0.10mm	0.009-0.15mm	0.009-0.15mm
		LD	0.02-0.15mm	0.02-0.15mm	0.03-0.15mm	0.03-0.15mm
最大产量	Max. extrusion output	HD	35kg/hr	40kg/hr	50kg/hr	55kg/hr
		LD	45kg/hr	50kg/hr	60kg/hr	70kg/hr
螺杆直径	Screw diameter	φ45	φ50	φ55	φ60	φ65
螺杆长径比	Screw l/d length	30:1	30:1	30:1	30:1	30:1
模口	Die size	HD	φ60/80	φ60/100	φ80/100	φ100
		LD	φ100/120	φ120/150	φ180/200	φ200
风机	Air blower	1.5kw	2.2kw	3kw	3kw	4kw
牵引辊宽	Roller width	600mm	700mm	900mm	1100mm	1300mm
主机功率	Main motor	11kw	15kw	18.5kw	22kw	22kw
引取电机功率	Take-up motor	0.75kw	1.1kw	1.1kw	1.5kw	1.5kw
卷取功率	Winding motor	10N.m	10N.m	10N.m	16N.m	16N.m
外形尺寸 (长×宽×高)	Outline dimension(L×W×H)	5.0×2.0×4.1m	5.0×2.1×4.5m	5.5×2.3×5.2m	5.8×2.8×6.3m	5.8×2.6×6.3m
印刷长度	Printing length(mm)	250-1000	250-1000	250-1000	250-1000	250-1000

* 机器外观及技术参数如有更改，恕不另行通知。未铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

MONO-INLINE PRINTING(FLEXO)

PE Extruder And Printing Machine
塑料吹膜凸版印刷机组

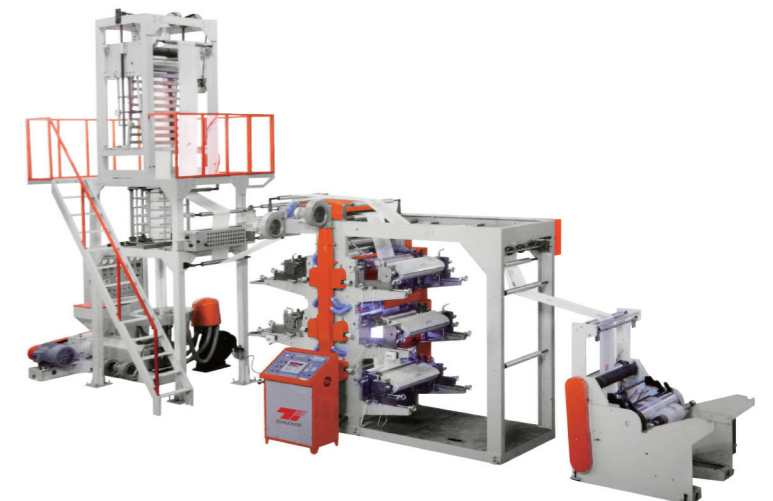

MINI MONO PERFORMANCE/HIGHSPEED

High Speed Mini Film Blowing Machine

迷你型高速吹膜机



Main Technical Parameters 主要技术参数

型号	Model	SJ-A45
产品宽度	Film width	100-500mm
产品厚度	Film thickness	0.01-0.10mm
最大产量	Max extrusion output	HD(50kg) LD(60kg)
螺杆直径	Screw diameter	φ45mm
主机功率	Main motor	15KW-4级西门子贝得 Siemens
模口	Die size	φ60mm.台湾式高速模头 Taiwan style high speed die head
外形尺寸 (长×宽×高)	Outline dimension (L×W×H)	3×1.5×3.6m

MINI MONO

MINI Type Film Blowing Machine

迷你型吹膜机

Optional Equipment 选择性配备

自动吸料机	Auto loader
电晕处理	Corona treater
快换网装置	Mechanics screen changer
气胀轴	Air shaft
米克重	Metric weight system
自动收卷	Automatic winder



Main Technical Parameters 主要技术参数


型号	Model	SJ-A45	
产品宽度	Film width	100-500mm	
产品厚度	Film thickness	HD	0.01-0.10mm
		LD	0.02-0.15mm
最大产量	Max extrusion output	HD	35kg/hour
		LD	40kg/hour
螺杆直径	Screw diameter	φ45	
螺杆直径比	Screw l/d length	30:1	
模口	Die size	HD	φ60
		LD	φ100
牵引辊宽	Roller width	600mm	
有效引膜宽度	Effective width	500mm	

* 机器外观及技术参数如有更改, 恕不另行通知。未铸信公司明确书面许可, 不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

MONO BIODEGRADABLE

Model Biodegradable Film Blowing Machine

降解料吹膜机



Performance Characteristics 性能特点

- | | |
|----------------------------------|--|
| 1、螺杆: 55型, 碳化型, 降解特质螺杆 | 1. Screw diameter: 55mm |
| 2、齿轮箱: 180型 | 2. Gear box: 180 model |
| 3、电机: 30KW 带变频调节 | 3. Main motor: 30kw, with inverter |
| 4、收卷采用中心收卷2层, 每层独立气胀轴带独立变频器控制 | 4. Winder station: center rewinder, 2 layer, each layer with air shaft and with inverter |
| 5、冷却风机采用变频控制, 无噪音 | 5. Air blower: with inverter |
| 6、模头采用30-180mm模口给客户选择。(模头只能选一个) | 6. Die head: 30-180mm, customer only can choose one size die head. |
| 7、模头带冷却功能 | 7. Die head with cooling |
| 8、螺杆采用3驱冷却, 并用离心风机控制 | 8. Screw with 3 zone cooling, and with air blower |
| 9、风环采用降解惯用风环, 双封口带温控隔离槽的特质风环 | 9. Air ring: double lip air ring specially air ring only for biodegradable film |
| 10、随机配备: 工具箱, 易损件等 | 10. Spare parts: tool box and others |
| 11、尺寸: (L)4800×(W)3200×(H)5000mm | 11. Machine size: 4800×3200×5000mm |
| 12、最大膜宽800mm | 12. Film width: 800mm, roller: 900mm |

DFR-450×2

Middle Speed Double-channels
Heat-sealing & heat-cutting Bag-making Machine

中速双通热封热切制袋机




Main Technical Parameters 主要技术参数

型号	Model	DFR-450×2
制袋宽度	Bag-making width	200-400mm
制袋长度	Bag-making length	10-999mm
制袋厚度	Bag-making thickness	0.01-0.05mm
制袋速度	Bag-making speed	120-200pcs/min
主机功率	Main motor	1.5kw
总功率	Total power	4.6kw
机重	Weight	900kg
外形尺寸 (长×宽×高)	Dimensions(L×W×H)	2500×1300×1500mm

RQL-600/1000

Computer Heat-cutting Side Sealing
Bagmaking Machine

电脑热切边封制袋机



Main Technical Parameters 主要技术参数

型号	Model	RQL-600	RQL-800	RQL-1000
封切长度	Length of sealing&cutting	600mm	600mm	600mm
封切宽度	Width of sealing&cutting	580mm	780mm	980mm
制袋速度	Speed of bag-making	40-198pcs/min	40-150pcs/min	40-120pcs/min
主机功率	Main power	1.1kw	1.5kw	1.5kw
机重	Weight	800kg	1000kg	1200kg
外形尺寸 (长×宽×高)	Outline dimension(L×W×H)	3600×1150×1700mm	3600×1350×1700mm	3600×1550×1700mm

ZB-FFS800

Heavy Duty Bag Making Machine
With Flying Knife

重包装飞刀制袋机



Main Technical Parameters 主要技术参数

型号	Model	ZB-FFS800
最大制袋宽度	Max width of bag-making	700mm
最大制袋长度	Max length of bag-making	1350mm
制袋速度	Bag making speed	10-30pcs/min
薄膜厚度	Film thickness	0.10-0.20mm
平均耗电量	Average power consume	10kw
机器尺寸	Machine dimension (L×W×H)	6300×1700×1600mm
机器重量	machine weight	1500kg

* 机器外观及技术参数如有更改, 恕不另行通知。未铸信公司明确书面许可, 不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

CY-600/700/800

Automatic T-shirt Bag
Making Machine (One Line)

全自动背心袋成型制袋机




Main Technical Parameters 主要技术参数

型号	Model	CY-600/700/800
制袋宽度	Max width of bag-making	200-650mm
制袋长度	Max length of bag-making	200-650mm
薄膜厚度	Thickness of film	0.015-0.035mm
制袋速度	Speed of bag-making	80-150pcs/min
外形尺寸 (长×宽×高)	Outline dimension(L×W×H)	5500×1200×1800mm

CY-500×2

Automatic T-shirt Bag-making
Machine (Two Lines)

双道全自动背心袋成型制袋机




Main Technical Parameters 主要技术参数

型号	Model	CY-500×2
制袋宽度	Max width of bag-making	450mm×2
制袋长度	Max length of bag-making	650mm
制袋速度	Max speed of bag-making	210pcs/min×2
薄膜单面厚度	Single-face film thickness	0.010-0.025mm
外形尺寸 (长×宽×高)	Outline dimension(L×W×H)	5500×1800×1600mm
机重	Weight	2700kg

CY-430×2

High-speed Automatic
T-shirt Bag-making Machine (Two Lines)

双道高速全自动背心袋成型制袋机



Main Technical Parameters 主要技术参数

型号	Model	CY-430×2
最大制袋宽度	Max width of bag-making	400mm×2
最大制袋长度	Max length of bag-making	650mm
制袋速度	Max speed of bag making	350pcs/min×2
薄膜单面厚度	Single-face film thickness	0.010-0.025mm
外形尺寸	Outline dimension(L×W×H)	5400×1850×1500mm
主机电机功率	Main motor	3.7kw

* 机器外观及技术参数如有更改, 恕不另行通知。未铸信公司明确书面许可, 不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

GFQ-600/1200

Computer Heat-sealing & Cold-cutting
Bag-making Machine (bottom sealing)

电脑热封冷切制袋机




Main Technical Parameters 主要技术参数

型号	Model	GFQ-600	GFQ-800	GFQ-1000	GFQ-1200
制袋最大宽度	Max. width of bag making	550mm	750mm	950mm	1150mm
制袋最大长度	Max. length of bag making	1500mm	1500mm	1500mm	1500mm
制袋速度	Speed of bag making	30-120pcs/min	30-100pcs/min	30-100pcs/min	30-80pcs/min
主电机功率	Power of motor	1.5kw	1.5kw	1.5kw	1.5kw
外形尺寸 (长×宽×高)	Machine size(L×W×H)	3200×1150×1550mm	3200×1350×1650mm	3200×1550×1750mm	3400×1750×1850mm
机重	Weight	750kg	900kg	1100kg	1300kg

SHXJ-600/1200

Heat Sealing And Cold Cutting
Machine With Computer 4 Lines (Bottom Sealing)

四线电脑热封冷切制袋机




Main Technical Parameters 主要技术参数

型号	Model	SHXJ-600	SHXJ-800	SHXJ-1000	SHXJ-1200
封切宽度	Width of sealing	550mm	750mm	950mm	1150mm
封切长度	Length of sealing	950mm	950mm	950mm	950mm
制袋速度	Speed of bag-making	30-120pcs/min	30-100pcs/min	30-100pcs/min	30-80pcs/min
电机功率	Power	1.5kw	1.5kw	1.5kw	2.2kw
外形尺寸 (长×宽×高)	Machine size(L×W×H)	3200×1150×1700mm	3200×1350×1800mm	3600×1550×1900mm	3600×1750×2000mm
机重	Weight	800kg	1000kg	1200kg	1400kg

SHXJ-370×4

Double Layer 4 Lines Heat Sealing And
Cold Cutting Bag Machine (Bottom Sealing)

双层四线电脑热封冷切制袋机

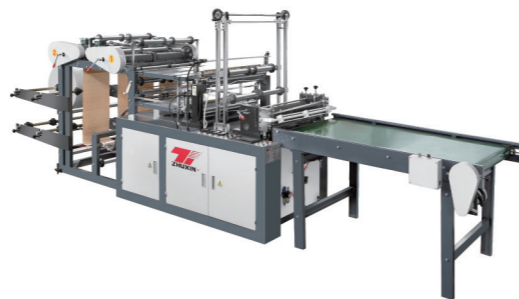


Main Technical Parameters 主要技术参数

型号	Model	SHXJ-370×4	型号	Model	SHXJ-370×4
制袋宽度	Bag width	350mm	总功率	Total power	8kw
制袋长度	Bag length	100-600mm	伺服电机	Servo motor	1.5kw
材料	Material	LDPE HDPE	主电机	Main motor	1.5kw
厚度	Thickness	0.01-0.025mm	放料主机	Unwinding motor	750wx4
制袋速度	Speed	50-120pcs/min x4	机重	Weight	2000kg
加热功率	Heating power	6kw	外形尺寸	Outline dimension	4500×1350×1800mm

* 机器外观及技术参数如有更改，恕不另行通知。未铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhui reserves the right to supply the improved products without prior notice.

CY-LR-1200

Left And Right Two-lines Double
Servo Cold Cutting Automatic T-shirt Bag Making Machine
左右双道双伺服冷切全自动背心袋制袋机

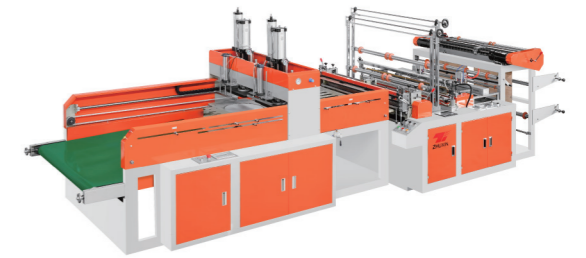


Main Technical Parameters 主要技术参数

型号	Model	CY-LR-1200
封切宽度	Width of sealing	550mm
封切长度	Length of sealing	950mm
制袋速度	Speed of bag-making	30-80pcs/min x2
电机功率	Power	2.2kw
外形尺寸 (长×宽×高)	Machine size(L×W×H)	6500×1750×2000mm
机重	Weight	2000kg

CY-SH-1000

Double-layer Four-lines Automatic
T-shirt Bag-making Machine

双层四线全自动背心袋制袋机

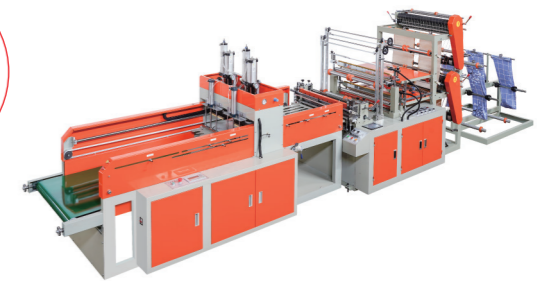


Main Technical Parameters 主要技术参数

型号	Model	CY-SH-1000	型号	Model	CY-SH-1000
袋宽 (单色)	Bag width(non printed)	100-450mm×4	生产速度	Speed	40-120pcs/min×4
主电机	Main power	1.5kw	薄膜厚度	Fim thickness	0.01-0.05mm
袋宽 (彩色)	Bag width(Printed)	100-950mm	整机重量	Gross weight	2500kg
袋长	Bag length	650mm	外形尺寸 (长×宽×高)	Machines size(L×W×H)	6500×1550×2000mm
放料电机	Unwinding motor	400w×4			

CY-SH-1200

Double-layer 8 Lines Cold Cutting Automatic
T-shirt Bag-making Machine

双层八线冷切全自动背心袋制袋机

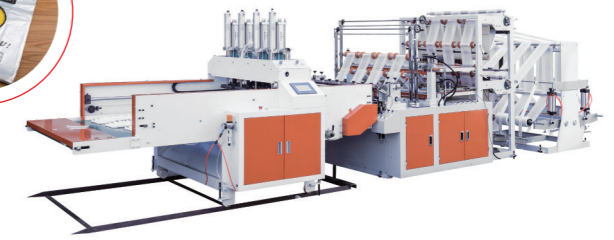

Main Technical Parameters 主要技术参数

型号	Model	CY-SH-1200
制袋宽度	Width of bag-making	120-195mm
制袋长度	Length of bag-making	600mm
制袋速度	Speed of bag-making	30-100pcs/min x8
薄膜厚度	Film thickness	0.01-0.03mm
机器重量	Machine weight	3000kgs
机器尺寸	Machine dimension(L×W×H)	7500×1750×2000mm

* 机器外观及技术参数如有更改，恕不另行通知。未铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhui reserves the right to supply the improved products without prior notice.

CY-800ZD

Automatic Soft Loop Handle Bag-making Machine With Servo Motor

全自动软手袋制袋机 (带伺服电机)



Main Technical Parameters 主要技术参数

型号	Model	CY-800ZD
制袋宽度	Bag width	250-650mm
制袋长度	Bag length	250-650mm
薄膜厚度	Film thickness	0.02-0.05mm
总功率	Total power	8kw
外形尺寸 (长×宽×高)	Outline dimensions(L×W×H)	7600×3000×1850
机重	weight	3000kg

ZXCS-800/1000

Ribbon-through Continuous-rolled Bag Making Machine

穿带连卷制袋机




Main Technical Parameters 主要技术参数

型号	Model	ZXCS-800	ZXCS-1000
制袋宽度/深度	Bag making width/depth	400-700mm	500-900mm
制袋长度	Bag making length	300-1000mm	500-1000mm
制袋速度	Bag making speed	50-160pcs/min	50-160pcs/min
制袋厚度	Bag making thickness	HDPE: 0.007-0.02mm LDPE: 0.02-0.05mm	HDPE: 0.007-0.02mm LDPE: 0.02-0.05mm
总功率	Total power	18kw	18kw
总重量	Total weight	2500kg	2500kg
整机尺寸	Overall dimension(L×W×H)	10000×2200×1900mm	10000×2200×1900mm

ZXF-500

Automatic Rolling Drawing Bag With Paper Core Making Machine

全自动有芯连卷超市平口保鲜袋制袋机



Main Technical Parameters 主要技术参数

型号	Model	ZXF-500
制袋速度	Speed of bag making	50-300bags/min
最高线速度	Max. speed of film	120m/min
制袋长度	Length of bag making	90-1000mm
制袋宽度	Width of bag making	60-400mm
制袋厚度	Thickness of bag making	0.005-0.015mm
制袋形式	Bag making methods	Shopping bag with core 有芯购物袋
温控区间	Temperature control zone	2 Zones
加热总功率	Heating power	6kw
总功率	Total power of machine	15kw
机器尺寸	Dimension of machine (L×W×H)	6000×1300×1800mm

* 机器外观及技术参数如有更改, 恕不另行通知。未铸信公司明确书面许可, 不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

DFL Series

Dfl Series Computer Cutting-off Continuous-rolled Bag Making Machine

电脑点断连卷制袋机



Main Technical Parameters 主要技术参数

型号	Model	DFL-500	DFL-600	DFL-700	DFL-800
制袋最大宽度	Max width of bag making	480mm	580mm	680mm	780mm
薄膜厚度	Film thickness	0.008-0.025mm	0.008-0.025mm	0.008-0.025mm	0.008-0.025mm
最大裁切长度	Max. cutting length	999mm	999mm	999mm	999mm
生产能力	Production capacity	30-120pcs/min	30-120pcs/min	30-120pcs/min	30-120pcs/min
总功率	Total power	3.2kw	3.4kw	3.6kw	4.2kw
外形尺寸 (长×宽×高)	Outline dimension(L×W×H)	3350×900×1500mm	3350×1000×1500mm	3350×1100×1500mm	3350×1250×1500mm
机重	Weight	650kg	750kg	800kg	900kg

SHXJ-A

Computer Control Two-layer Rolling Bag-making Machine For Vest & Flat Bags

电脑控制双层连卷背心/平口袋制袋机



Main Technical Parameters 主要技术参数

型号	Model	SHXJ-A-500	SHXJ-A-600	SHXJ-A-700	SHXJ-A-800
最大制袋宽度	Max width of bag making	400mm*2	500mm*2	600mm	700mm
最大制袋长度	Max length of bag making	1000mm	1000mm	1000mm	1000mm
制袋厚度	Thickness of film	0.01-0.10mm	0.01-0.10mm	0.01-0.10mm	0.01-0.10mm
制袋速度	Speed of bag-making	20-200*2pcs/min	20-200*2pcs/min	20-200*2pcs/min	20-200*2pcs/min
总功率	Power	5kw	5kw	5kw	5kw
整机重量	Weight	800kg	800kg	800kg	800kg
外形尺寸	Outline dimension (L×W×H)	3500×1050×1800mm	3500×1150×1800mm	3500×1250×1800mm	3500×1350×1800mm

ZX-400×2

Drum-type Cutting Off Continuous Rolled Bag Making Machine

滚筒式点断连卷制袋机




Main Technical Parameters 主要技术参数

型号	Model	ZX-400×2
制袋宽度	Bag making width	100-180mm
制袋长度	Bag making length	400-1200mm
制袋速度	Bag making speed	50-200pcs/min
制袋厚度	Bag making thickness	0.006-0.025mm
制袋形式	Bag making methods	Coreless Garbage Bag (Star Bottom) 无芯平口垃圾袋(星底)
加热总功率	Heating power	8kw
温控区间	Temperature control zone	4 Zones
总功率	Total power	20kw
总重量	Total weight	2000kg
整机尺寸	Overall dimension(L×W×H)	6200×2000×1750mm

* 机器外观及技术参数如有更改, 恕不另行通知。未铸信公司明确书面许可, 不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

CY-500C

Full Automatic Double Layer Disposable Glove Machine
双层全自动一次性手套机

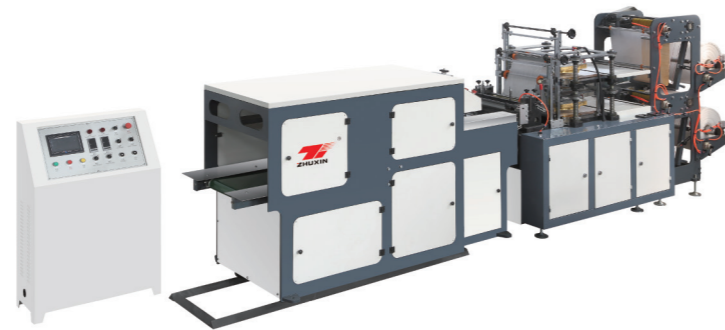

Main Technical Parameters 主要技术参数

型号	Model	CY-500C x 2
制手套长度	Glove length	200-350mm
制手套宽度	Glove width	240-320mm
薄膜厚度	Film thickness	0.008-0.02mm
制手套速度	Speed	80-400 pcs/min
主机功率	Main motor	2.2KW
电源	Power	380V 50HZ
机器重量	Weight	900kg
外型尺寸 (长×宽×高)	Machine size(L×W×H)	2700×1100×1500mm

CY-500x2

Full Automatic Disposable Glove Machine
全自动一次性手套机



Main Technical Parameters 主要技术参数

型号	Model	CY-500x2
制手套长度	Glove length	200-350mm
制手套宽度	Glove width	240-320mm
薄膜厚度	Film thickness	0.008-0.02mm
制手套速度	Speed	80-400 pcs/min
主机功率	Main motor	2.2KW
电源	Power	380V 50HZ
机器重量	Weight	900kg
外型尺寸 (长×宽×高)	Machine size(L×W×H)	2700×1100×1500mm

* 机器外观及技术参数如有更改，恕不另行通知。未铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

ZB Series

Edge Folding And Rolling Machine
折边收卷机



Main Technical Parameters 主要技术参数

型号	Model	ZB-1200	ZB-1400	ZB-1600
最大基材宽度	Max width of base material	1200mm	1400mm	1600mm
最高收卷速度	Max roll speed	60m/min	60m/min	60m/min
总功率	Motor power	1.1kw	1.1kw	1.5kw
外形尺寸 (长×宽×高)	Outline dimension(L×W×H)	2400×1500×1500mm	2600×1500×1500mm	2800×1500×1500mm
机重	Weight	800kg	900kg	1000kg

CY-HB

Soft Loop Handle Bag-making Machine
软式手提环制袋机



Main Technical Parameters 主要技术参数


型号	Model	CY-HB			
制袋最大宽度	Max width of bag-making	250-600mm	电源	Power	AC220V
制袋最大长度	Max length of bag-making	700mm	电机功率	Total power	1.1kw
封切厚度	Thickness of material	0.05-0.2mm	外形尺寸 (长×宽×高)	Outline dimension(L×W×H)	1200×1200×1200mm
制袋速度	Speed of bag making	20pcs/min	整机重量	Weight	1100kg

* 机器外观及技术参数如有更改，恕不另行通知。未铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

YT-6100S

Six-color Flexographic High Speed Printing Machine

六色柔版高速印刷机

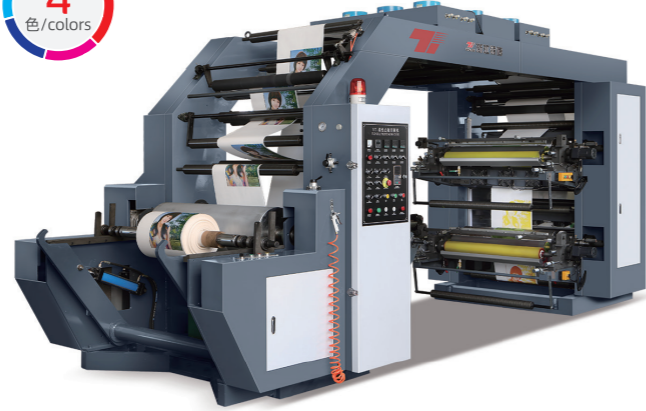

Main Technical Parameters 主要技术参数


型号	Model	YT-600	YT-800	YT-1000
最大材料宽度	Max.width of substrate	600mm	800mm	1000mm
最大印刷宽度	Max.printing width	560mm	760mm	960mm
合适的印刷材料	Printing materials	20-350克的纸和膜 20-350g paper and film		
最大印刷速度	Printing speed	120m/min	120m/min	120m/min
板材厚度	Plate thickness	1.7-3.4	1.7-3.4	1.7-3.4
整机重量	Weight of machine	5000	5500	6000
外形尺寸 (长×宽×高)	Machine size (L×W×H)	6.8×1.8×2.9m	6.8×2×2.9m	6.8×2×2.9m

* 机器外观及技术参数如有更改，恕不另行通知。未铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

YT Series

YT Series Flexo Printing Machine

柔性凸版印刷机

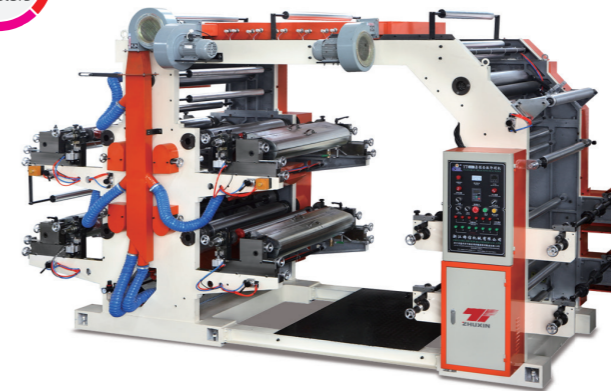

Optional Equipment 选择性配备

凸版印刷制版机 Flexo plate making machine

Main Technical Parameters 主要技术参数


型号	Model	YT-2600	YT-2800	YT-21000	YT-4600	YT-4800	YT-41000	YT-6600	YT-6800	YT-61000
最大印料宽度	Max width of substrate	600mm	800mm	1000mm	600mm	800mm	1000mm	600mm	800mm	1000mm
最大印刷宽度	Max printing width	560mm	760mm	960mm	560mm	760mm	960mm	560mm	760mm	960mm
印刷品长度范围	Range of printing length	200-1100mm	180-1000mm	200-1100mm	200-1100mm	200-1100mm	200-1100mm	200-1100mm	200-1100mm	200-1100mm
卷材最大直径	Max diameter of web	φ450mm	φ450mm	φ450mm	φ450mm	φ450mm	φ450mm	φ450mm	φ450mm	φ450mm
印刷速度	Printing speed	5-50m/min	5-50m/min	5-50m/min	5-50m/min	5-50m/min	5-50m/min	5-50m/min	5-50m/min	5-50m/min
外形尺寸 (长×宽×高)	Outline dimension (L×W×H)	1900×1800×2300mm	1900×2000×2300mm	1900×2200×2400mm	4200×1600×2400mm	4200×1800×2400mm	4200×2000×2400mm	4200×1660×2950mm	4200×1860×2950mm	4200×2060×2950mm
版材厚度 (包括双面胶带)	Plate thickness (both side adhesive tape included)	2.38mm	2.38mm	2.38mm	2.38mm	2.38mm	2.38mm	2.38mm	2.38mm	2.38mm

* 机器外观及技术参数如有更改，恕不另行通知。未铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

ZXRY-41000A

High Speed 4 Color
1000mm Flexible Printing Machine

卫星式高速4色柔版印刷机

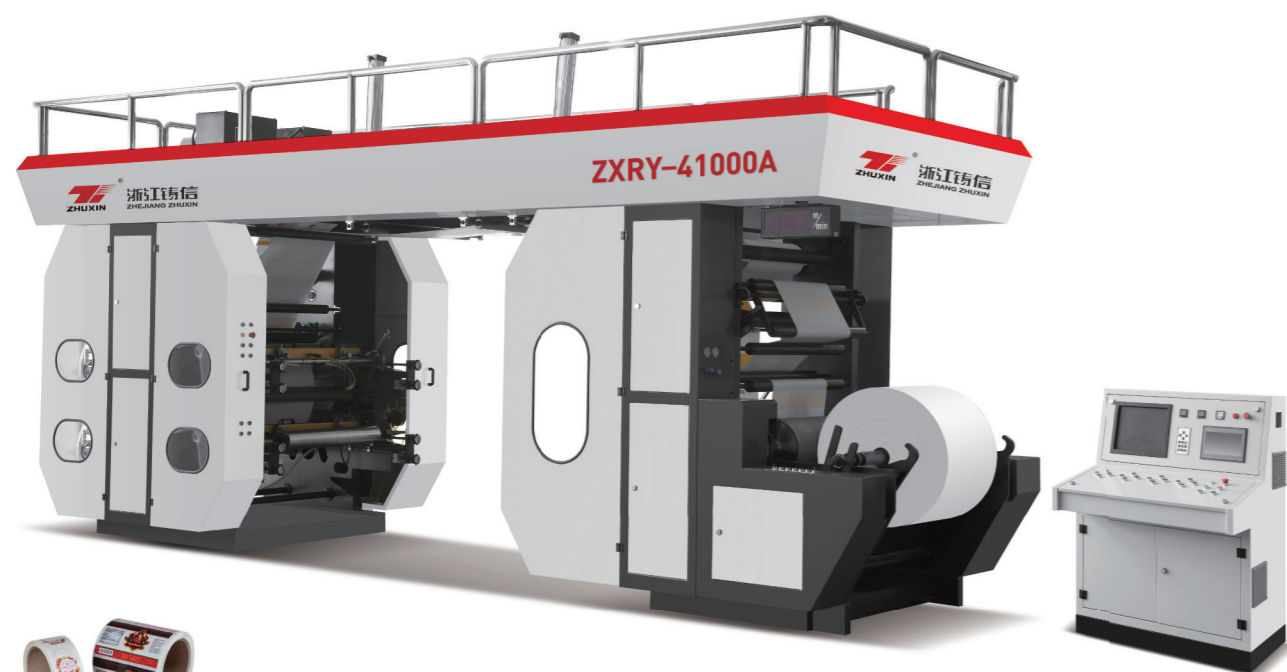

Main Technical Parameters 主要技术参数


型号	Model	ZXRY-41000A
色数	Machine colors	4/6colors
最大材料宽度	Max.raw material width	1000mm
最大印刷宽度	Max.printing width	960mm
合适的印刷材料	Printing materials	20-350克的纸和膜 (Paper 20-350gsm)
最大印刷速度	Printing speed(m/min)	150m/min
套准精度	Register precision	0.1mm
放卷直径	Unwind diameter	Φ1200mm
收卷直径	Rewind diameter	Φ1200mm
主马达	Master motor power	7.5kw
机器功率	Machine power	44kw
电源	Power supply	3P380V50HZ
整机重量	Weight of machine	5000KG
外形尺寸 (长×宽×高)	Machine size (L×W×H)	7.0×2.6×4.0m

* 机器外观及技术参数如有更改, 恕不另行通知。未铸信公司明确书面许可, 不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

WFQ Series

Horizontal Type High Speed Automatic
Slitting Machine
(Separating And Cutting Machine)

卧式高速自动分切机

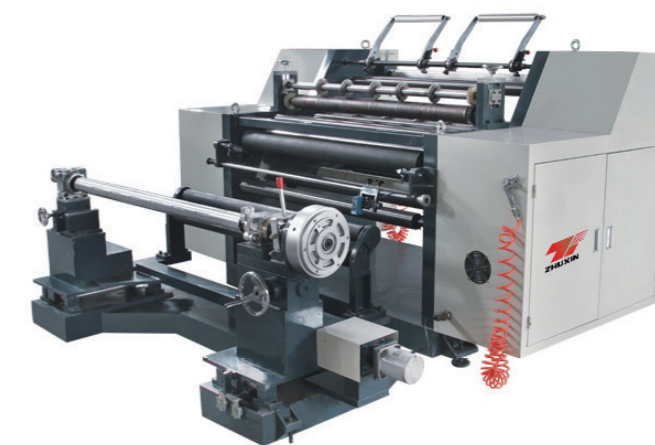

Main Technical Parameters 主要技术参数

型号	Model	WFQ-1000	WFQ-1300
分切卷材最大宽度	Max width of separating and cutting roll material	1000mm	1300mm
分切卷材放料最大直径	Max diameter of separating and cutting Roll material for unwinding	φ700mm	φ1000mm
分切卷材收料最大直径	Max diameter of separating and cutting Roll material for rewinding	φ500mm	φ500mm
分切卷材宽度	Width of roll material cutting	30-1000mm	30-1300mm
分切速度	Separating and cutting speed	5-160m/min	5-160m/min
纠偏误差	Deviation-rectfying error	≤0.5rmm	≤0.5rmm
总功率	Total power	3kw	4.8kw
外形尺寸 (长×宽×高)	Outline dimension(L×W×H)	2540×1170×1460mm	2540×1370×1460mm
机重	Weight	2000kg	2800kg

LFQ Series

Lfq Series Vertical Automaticslitting Machine
(Separating And Cutting Machine)

立式自动分条机



Main Technical Parameters 主要技术参数


型号	Model	LFQ-700	LFQ-1000	LFQ-1300
最大宽度	Max width	700mm	1000mm	1300mm
放料最大直径	Max diameter of unwinding	φ600mm	φ600mm	φ600mm
收料最大直径	Max diameter of rewinding	φ450mm	φ450mm	φ450mm
分切卷材宽度	Width of roll material cutting	30-650mm	30-1000mm	300-1300mm
分切速度	Separating and cutting speed	5-160m/min	5-160m/min	5-160m/min
纠偏误差	Deviation-rectfying error	≤0.5rmm	≤0.5rmm	≤0.5rmm
总功率	Total power	2.2kw	3kw	3kw
外形尺寸 (长×宽×高)	Outline dimension(L×W×H)	1100×770×1400mm	1100×1070×1400mm	2540×1370×1460mm
机重	weight	1200kg	1500kg	2200kg

* 机器外观及技术参数如有更改, 恕不另行通知。未铸信公司明确书面许可, 不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

SJ-100/180

Single/Double machine hard material granulation unit (PP,HDPE,LDPE,PS,PC,ABS,EVA)

单/双机硬料造粒机组

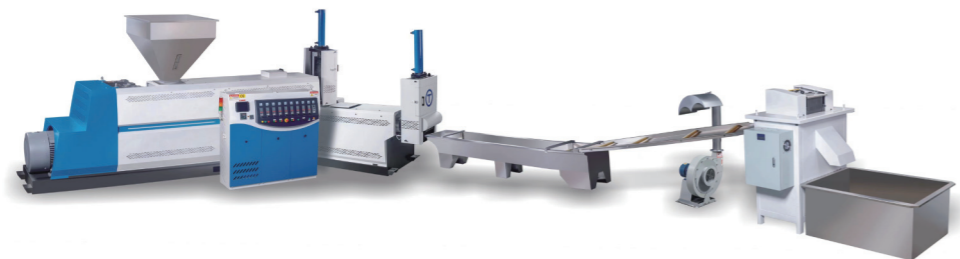

Main Technical Parameters 主要技术参数

型号	Model	SJ-100	SJ-180
主机螺杆直径	Diameter of main motor screw	φ97mm	φ117mm
副机螺杆直径	Diameter of auxiliary motor screw	95mm	107mm
主机功率	Power of main motor	15kw	18.5kw
副机功率	Power of auxiliary motor	7.5kw	11kw
切料机功率	Power of material cutter	1.5kw	1.5kw
加热功率	Power of heating	15kw	20kw
产量	Output	50kg/h	70-100kg/h
机器重量	Weight	1200kg	1800kg

SJ-B90/100/110/120

Wind Cooling Hot Cutting Recycling Machine

风冷造粒机



Main Technical Parameters 主要技术参数

型号	Model	SJ-B90	SJ-B100	SJ-B110	SJ-B120
螺杆直径	Diameter of screw	φ90	φ100	φ110	φ120
螺杆长径比	L/d of screw	20:1-22:1	20:1-22:1	20:1-22:1	20:1-22:1
螺杆转速	Rational speed of screw	10-110r/min	10-110r/min	10-110r/min	10-110r/min
主电机功率	Main motor power	22kw	30kw	37kw	45kw
产量	Output	68kg/hr	95kg/hr	120kg/hr	135kg/hr
机器重量	Weight	2600kg	2800kg	3000kg	3200kg
占地尺寸(长×宽×高)	Outline dimension(L×W×H)	4000×1500×1800mm	4200×1500×1800mm	4400×1500×1800mm	4600×1500×1800mm

* 机器外观及技术参数如有更改, 恕不另行通知。未铸信公司明确书面许可, 不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

SJ-B150/300

Plastic Grinding Milling Granulator

塑料混炼造粒机



Main Technical Parameters 主要技术参数

型号	Model	SJ-B150	SJ-B300
机器筒体容量	Capacity of barrel	150L	300L
生产能力	Output capacity	60-80kg/h	200-300kg/h
主电机功率	Main motor power	18.5kw	37.5kw
主轴转速	Rotary speed of main shaft	660r/min	660r/min
机器外形尺寸(长×宽×高)	Overall dimensions(L×W×H)	1800×750×1400mm	2000×900×1600mm
刀数	Number of knives	2 turn 6 fixed knife	3 turn 4 fixed knife
机器重量	Weight	900kg	1200kg

Plastic Grind Machine

塑料粉碎机



Main Technical Parameters 主要技术参数

型号	Model	F250	F500
产量	Output	100kg/hr	300kg/hr
电机	Motor	7.5kw	11kw
进料口尺寸	Size of material inlet	300×300mm	300×300mm
刀数	Cutter quantity	5pcs	8pcs
外形尺寸(长×宽×高)	Outline dimension(L×W×H)	700×1200×1500mm	950×1450×1600mm
机重	Weight	350kg	700kg

* 机器外观及技术参数如有更改, 恕不另行通知。未铸信公司明确书面许可, 不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

LD-10T
Hydraulic Rocker Punching Machine
液压摇臂冲口机



BZD
Punching Machine
冲口机



Auto Loader
自动吸料机



Electrical Corona Treater
电子式电晕处理机



Conveyor
输送台



Metric Weight Control System
米克重



180
Automatic Film Extraction And
Crushing Machine
薄膜自动引取粉碎机



Mixer
搅拌机




Pelletizer
切粒机



Fittings

配件

Air Ring
风环



Die Head
模头



**PP Blown Film Machine
Water Jacket**
PP吹膜机水套



Screw and Barrel
螺杆和料筒



High-Speed Screen Changer
快速换网器



**High Strength Hard Toothed
Surface Reduction Gearbox**
高强度硬齿面减速机



Screw Air Compressor
螺杆式空压机



**Bag Making Machine
Control System**
制袋机控制系统



**Computer+DriverHeat-Sealing & Cold-Cutting Bag
-Making Machine)**
热封冷切电脑+驱动器



Electrical Corona Treater
电子式电晕处理机



Conveyor
输送台



Metric Weight Control System
米克重



**Computer+DriverHeat-Sealing & Cold-Cutting Bag
-Making Machine)**
热封冷切电脑+驱动器




Punch
打孔机



Step Motor
步进电机



EPC
纠偏



Punch
手提打孔机



Servo Motor
伺服电机



Inverter
变频器




Air Compressor
空气压缩机



Water Chiller
冷水机



Air Blower
风机



Air Shaft
气胀轴



Rubber Roller
胶辊



Anilox Roller
网纹辊



Printing Press Rollers
印刷机版辊

